





PAVE-MATE MODEL PM060

**THE SELF CONTAINED
UNIT DESIGNED TO FIT
ANY HEAVY DUTY 1/2-TON
OR LARGER PICKUP FOR
CUTBACK AND
EMULSIFIED LIQUID
ASPHALT* DISTRIBUTION**



QUALITY FEATURES OF THIS NEW DIAMOND.....

- ◆ Precise control of spray volume and pressure from a positive displacement gear pump and adjustable pressure relief.
- ◆ Even mixing and heating of oil from a recirculation system that minimizes asphaltic buildup.
- ◆ Unit holds two 20# bottles for LPG.
- ◆ Non-pressurized tank eliminates danger of explosion or sudden pressure release during filling.
- ◆ Fast cleanup using efficient solvent flushing system that cleans the pump, plumbing, hose, and spray wand.
- ◆ 12-volt DC LPG ignitor.
- ◆ Spray wand recirculation.
- ◆ 5' light weight spray wand with end shutoff valve.
- ◆ Electric start engine is a standard feature.

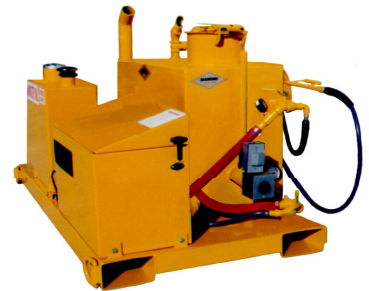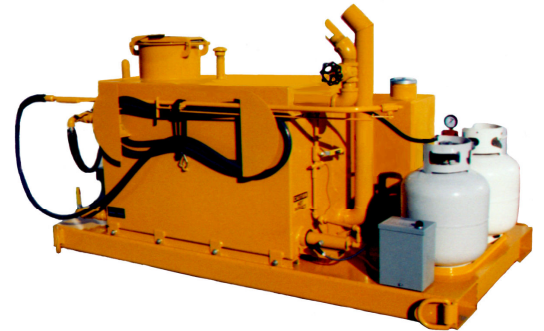

*Not in compliance with D.O.T. requirements for use with flammable materials with flash points below 100° F.

*Ask for information on 40, 130, 200, 230,
400 and 800-gallon Pave-Mate Skid,
Trailer and Distributor Models and
SurSeal Slurry Equipment .*

BUY A REAL GEM ...

PAVE-MATE

...BY DIAMOND BILT

Model Specifications and Options for PM060

BITUMINOUS OIL FLUSHING & RECOVERY TANKS	Net Liquid Oil Capacity (U.S. Gallons +5% Expansion)	60
	Lockable Fill Opening Diameter (Oil Tank)	10"
	Net Liquid Flushing/Recovery Capacity (U.S. Gallons)	7/7
OIL PUMPING SYSTEM	Oil Pumping Capacity (GPM)	13
	Drive: V-belt with Heavy Duty Centrifugal Clutch	Standard
	Hinged Hood Over Pump/Engine Assembly	Standard
	5 Ft. Light weight Spray Wand with End Shutoff Valve	Standard
	25 Ft. Spray Wand Hose	Standard
	Spray Wand Recirculation	Standard
PUMP POWER MODE	5 BHP Electric Start	Standard
	U-1 Battery	Standard
TANK HEATING	Exhaust Heat Bonnet Over Bituminous Pump	Standard
	1½" L.P. Gas Burner	Standard
	3" Diameter Full Length U Shaped Retort Tube	Standard
	0-20 PSI Regulator & Gauge for LPG	Standard
	LPG Safety Out Fire Protection Valve & Thermocouple	Standard
	12 VDC Electric Spark Ignitor	Standard
	32-250° F Thermometer	Standard
TANK SKID	Fork Lift Pockets 4x8 inch Full Length	Standard
	Full 12 Gauge Top	Standard
	Asphalt Flush/Recovery Tanks Bolted to Skid Frame	Standard
	D-rings to Secure Equipment	Standard
FINISH	Black Enamel	Standard
	Yellow (ZYEL) Orange (ZORG) Red (ZRED)White (ZWHT)	Option
MISC. SPECIFICATIONS	Height	36"
	Width	37"
	Length	72"
	Net Weight Excluding Options	785#
	Approx. Loaded Weight 60 gal. emulsion, 7 gal. flush & 2 ea. 20# LPG bottles	1,400#
MISC. OPTIONS	Fifty (50) Foot Spray Wand Hose (Z50H)	Option
	D.O.T. Combustible Placards & 20-BC Fire Ext. (ZDOT)	Option
	115-volt Out-of-Service Tank Heater w/Thermostat (ZETH)	Option
	LPG Hand torch w/Regulator, 25 ft Hose &D-Wraps (ZPJT)	Option



DIAMOND STEEL CO. INC.
971 N. GEORGE WASHINGTON BLVD.
YUBA CITY, CA 95993-9067
(530)674-8577 FAX (530)674-7339

Distributed By: